


TECHNICAL DATA SHEET



EVODRAIN FLEX R2 TP SN4/SN8

Double walled (R2 type) drainage pipe DN/OD, totally perforated TP (360°)

Conformity:


DIN 4262-1

Pipe profile type: R2

Perforation class: TP(360°)

PRODUCT DESCRIPTION

Without filter material

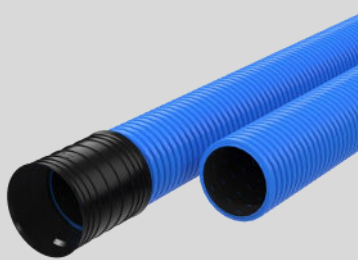

EVODRAIN FLEX is a drainage pipe with corrugated external wall and smooth internal surface according to product standard DIN 4262-1 conforms to profile type R2 and perforation class TP (360° totally perforated drainage pipe) with water filtration inlet perforation opening area >50 cm²/m. Pipes are available in coils- total pipe length 50m. Every coil is supplied with a double sleeve. Nominal ring stiffness class SN4/SN8:

- Without filter material;
- With type A woven textile filter material overlay;
- With carpet type coir filter material overlay.

Pipes inner and outer surface color is black.

With type A woven textile filter material overlay



Pipe material: HDPE (high density polyethylene).

Pipe produced according to standard: DIN 4262-1

Type A woven textile filter material: 100% polyester yarn with a nominal yarn linear density dtex=167 g/10km (den=150) with 48 fibril filament. Circular multi-lacoste knitted.

Carpet type coir filter material: 100% coco fiber stitched on two sides with Polypropylene (PP) or Jute netting.

Pipe produced according to standard: DIN 4262-1

Type A woven textile filter material produced according to: ASTM D6707-06, FN 13252

Carpet type coir filter material produced according to manufacturers technical specification which is portrayed in manufacturers technical data sheet.

With carpet type coir filter material overlay



APPLICATION AREA

Corrugated drainage pipes are best suited for establishing hidden horizontal drainages to ensure dehumidification of the landfills. Drainage is to be installed on the land where ground-water depth is less than dehumidification norm, i.e. where high humidity saturation in the ground may result in slower drying of the productive soil at spring, as well as in destruction of basements of the building, road elution, etc.

- In agriculture, forestry, in parks, squares and peat fields;
- Temporary and permanent drainage systems at construction sites;
- Stadiums and sport complexes;
- Pavements, pedestrian and bicycle paths;
- Landfills (liquid and biogas collection);
- Road construction:
 - Without transport load;
 - With transport load


Ring stiffness:

SN4

SN8

Open product

TECHNICAL DATA SHEET



EVODRAIN FLEX R2 TP SN4/SN8

Double walled (R2 type) drainage pipe DN/OD,
 totally perforated TP (360°)

Conformity:

DIN 4262-1

Pipe profile type: R2

PRODUCT DIMENSIONS

Without filter material



Pipe dimensions

	63	75	90	110	125	160
Nominal size	63	75	90	110	125	160
Inside ID, mm	52	62,0	76,20	94,10	106,0	137,60
Profile height (h), mm	5,15	5,15	5,90	7,95	9,15	11,20
Perforation angle (α), m	60°	60°	60°	60°	60°	60°
Perforation opening length (b), mm	11,00	13,30	13,20	9,16	10,11	11,19
Perforation opening width (a), mm	1,20	1,20	1,40	1,20	1,20	1,40
Perforation opening area, cm²/m	≥50	≥50	≥50	≥50	≥50	≥50
Perforation opening quantity, pcs	3	3	3	6	6	6
Pipe length (coil), m	50	50	50	50	50	50

With type A woven textile filter material overlay




Type A woven textile filter material dimensions

Parameter	Value	Test method
Minimum fabric thickness, mm	0,600	ASTM D388 / 96
Fabric thickness at 2 kPa, mm	0,600	EN ISO 9863-1


With carpet type coir filter material overlay




Ring stiffness:

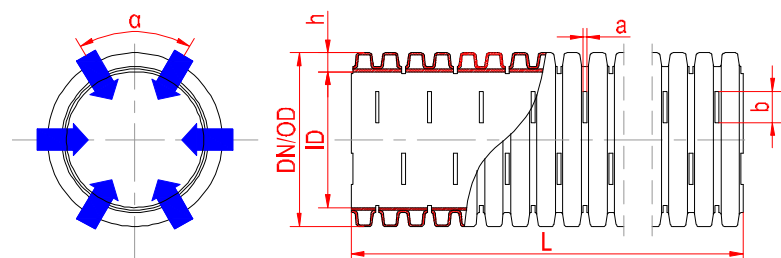SN4
SN8
Open product


EVODRAIN FLEX R2 TP pipe without filter material

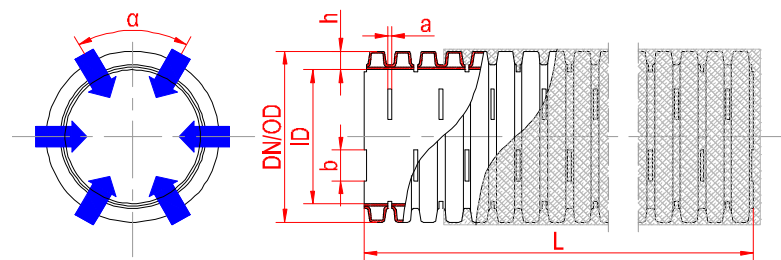


EVODRAIN FLEX R2 TP pipe with type A woven textile filter material overlay

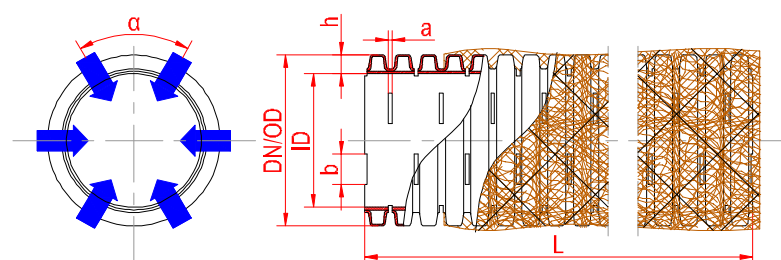

EVODRAIN FLEX R2 TP pipe with carpet type coir filter material overlay

TECHNICAL DATA SHEET



EVODRAIN FLEX R2 TP SN4/SN8

Double walled (R2 type) drainage pipe DN/OD series,
 totally perforated TP (360°)

According to DIN 4262-1
 Pipe profile type: R2
 Perforation class: TP(360°)

PRODUCT PARAMETERS

Without filter material



Pipe physical and mechanical properties

Parameter	Value	Test method
Material	HDPE	DIN 4262-1
Ring stiffness, kN/m²	4; 8	EN 9969
Resistance to external loads, by applying staircase method: d90, 0.8 10.005 kg, - min 0.8m, t=(10)°C	H ₂₅ > 12m	EN ISO 11173

Pipe flushing (cleaning) allowance parameters

Max pressure, bar	120
Minimum flow rate, l/min	80

Type A woven textile filter material physical and mechanical properties

With type A woven textile filter material overlay



Parameter	Value	Test method
Material	PET	EN 13252 ASTM D670 / 96
Area density, g/m²	105..135	EN ISO 9864 ASTM D388 / 96
Characteristic opening size O ₉₀ , µm	max 300	EN ISO 12956
Apparent opening size, mm	0.300.0 / 25	ASTM D1751 / 12
Puncture resistance, N	1000	ASTM D6211 / 17
Static puncture resistance (CBR test), N	1000	EN ISO 12236
Minimum bursting strength, kPa	800	ASTM D3786 / 33 / 86M
Bursting strength (pneumatic method), kN/m²	800	EN ISO 13938-2

Type A woven textile filter material hydraulic properties

With carpet type coir filter material overlay



Bursting strength (pneumatic method), kN/m²	800	EN ISO 13938-2
Permeability, s/l	3,8..4,2	ASTM D4191 / D4191M
Permeability, cm/s	0,27..0,28	ASTM D4191 / D4191M
Minimum water flow rate (5 mm hydraulic head), l/min m²	11000	ASTM D4191 / D4191M
Water permeability (without load) V ₃₀ , m/s	0,183	EN ISO 11058
Minimum air permeability, cm³/cm² s	356	EN ISO 9237 ASTM D757 / 97

Type A woven textile filter material additional properties

Expected lifetime (ground with 4sp-±5%, at ground temperature ≤25°C), years	<50	EN 13252
UV resistance	Not recommended to expose to direct sunlight for period that exceeds 45 days	
Chemical resistance	Generally good, however contact with strong acids and oxidizers should be avoided	
Atmospheric resistance	After installation in trench, pipe should be covered with soil, not more than a month afterwards	

Ring stiffness:

SN4
SN8

Open product

Carpet type coir filter material physical and mechanical properties

Parameter	Value	Test method
Material	Coco fiber	Manufacturers technical documentation
Area density, g/m²	≥500	EN ISO 9864

TECHNICAL DATA SHEET

STANDARDS APPLICABLE TO PIPES

Standard	Description
DIN 4262-1	Pipes and fittings for subsoil drainage of trafficked areas and underground engineering. Part 1: Pipes, fittings and their joints made from PVC-U, PP and PE
Pipe geometric parameters according to:	
EN 3126	Plastic piping systems. Plastic components. Determination of dimensions
Pipe mechanical parameters according to:	
EN ISO 9969	Thermoplastics pipes. Determination of ring stiffness
EN 9967	Thermoplastics pipes. Determination of creep ratio
EN ISO 11173	Plastics piping and ducting systems. Thermoplastics pipes. Determination of resistance to external blows by staircase method

STANDARDS APPLICABLE TO FILTERS

A type textile filter material conforms to standards:


ASTM D6707-06	Standard specification for circular knit geotextile for use in subsurface drainage applications
EN 13252	Geotextiles and geotextile related products. Characteristics required for use in drainage systems
ASTM D3887-96	Standard specification for tolerances for knitted fabrics
EN ISO 9863-1	Geosynthetics. Determination of thickness at specified pressures. Part 1: Single layers
EN ISO 9864	Geosynthetics. Test method for the determination of mass per unit area of geotextiles and geotextile related products
ASTM D4151-12	Standard test method for determining apparent opening size of a geotextile
EN ISO 12956	Geotextiles and geotextile related products. Determination of the characteristic opening size
ASTM D6241-17	Standard test method for static puncture strength of geotextiles and geotextile related products using a 50 mm probe
EN ISO 12236	Geosynthetics. Static puncture test (CBR test)
ASTM D3786/D3786M-13	Standard test method for bursting strength of textile fabrics. Diaphragm bursting strength test method
EN ISO 13938-2	Textiles. Bursting properties of fabrics. Part 2: Pneumatic method for determination of bursting strength and bursting distension
ASTM D4151/D4191M-13	Standard test methods for water permeability of geotextiles by permittivity
EN ISO 11058	Geotextiles and geotextile related products. Determination of water permeability characteristics normal to the plane, without load
ASTM D757-07	Test method for air permeability of textile fabrics
EN ISO 9237	Textiles. Determination of the permeability of fabrics to air

Carpet type coco fiber filter material conforms to standards:

According to manufacturer technical specification which is portrayed in manufacturers product technical data sheet

TECHNICAL DATA SHEET

Pipe EVODRAIN FLEX R1/R2 application for drainage piping systems

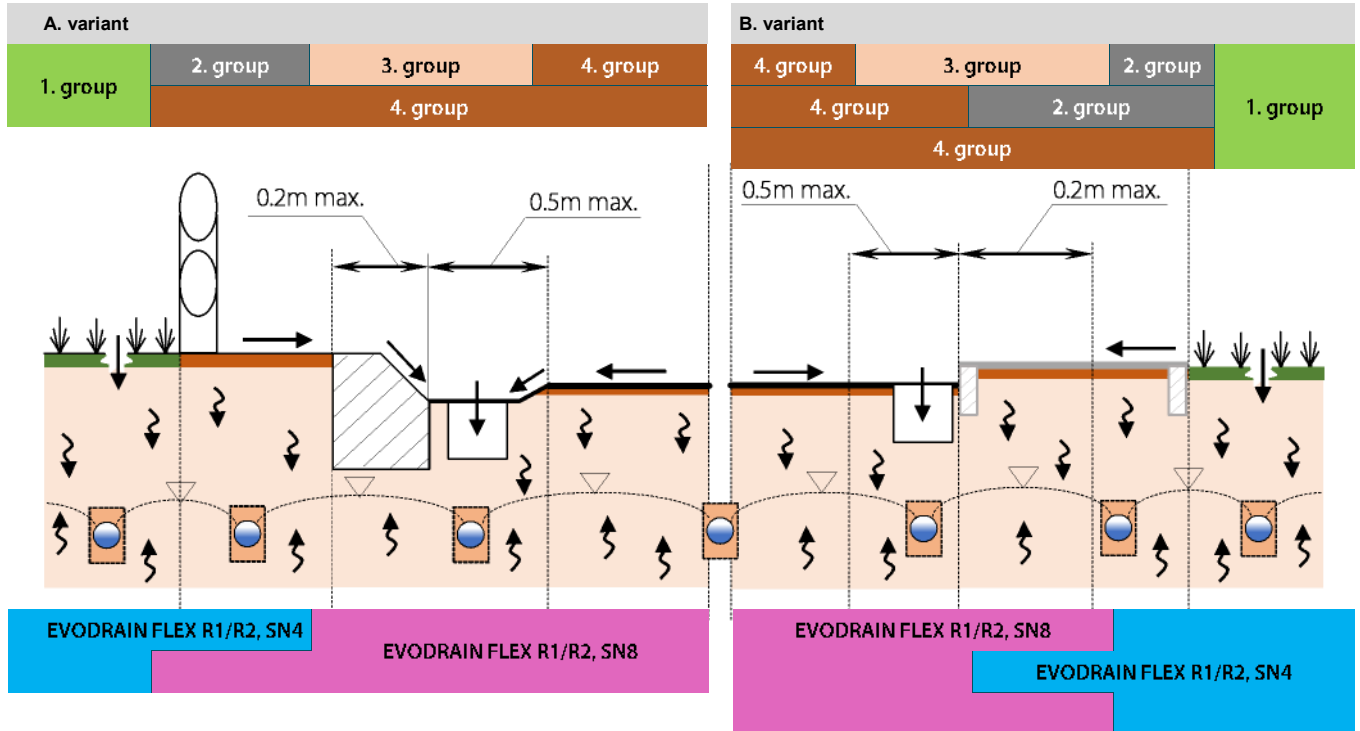

A. variant

Typical highway cross section, split into groups according to nominal strength (SN) class application of EVODRAIN FLEX pipes.

B. variant

Representative cross section of city street (carriageway) and pavement (sidewalk) or a hard shoulder, split into groups according to nominal strength (SN) class application of EVODRAIN FLEX pipes.

1. Group	2. Group	3. Group	4. Group
Areas which can only be used by pedestrians and pedal cyclists.	Pedestrian areas and comparable areas, car parks or car parking decks.	Areas of kerbside channels of roads which, when measured from the kerb edge, extends a maximum of 0.5 m into the carriageway and maximum of 0.2 m into the pedestrian area.	Carriageways of roads (including pedestrian streets), hard shoulders and parking areas, for all types of road vehicles.

APPLICATION BY SUBSTANCE TYPE

Substance type	Without filter material overlay	With A type filter material	With coco fiber filter material
Binding– poorly filtering ground			
Clay	No	No	Yes
Dense sandstone	No	No	Yes
Sandstone	No	Yes	Yes
Non-binding– poorly filtering ground			
Loam	No	Yes	No
Binding–well filtering ground			
Coarse sand	Yes	Yes	No
Binding sand	No	Yes	No
Non-binding sand (loose)	No	Yes	No
Gravel	Yes	Yes	No
Turf	No	Yes	Yes